


Adventure Hat

By: Patterns for Pirates



Before you start:

- Read instructions before beginning.
- I suggest preparing your fabric exactly how you will care for the finished garment- meaning if you're going to machine wash and dry, do it now! It will prevent any shrinkage, color bleeding, and get any nasty chemicals off!
- When printing pattern, make sure scale is set to 'none' or 'actual size'. Take your time matching and taping. Carefully measure the 2"x2" or 4cmx4cm grey square on page A1 to make sure it printed correctly (even if it is off by 1/8" it will change your fit dramatically!)
- These are NO TRIM pages... just line up edge of paper to dark grey guide line:
[Here is a video for more help.](#) (You must be a member of the [P4P FB group](#)).
- You are free to sell products made from the pattern. I would LOVE for you to cite that it was a 'Patterns for Pirates' pattern in your listing!
- As always, back stitch when starting and ending a seam.

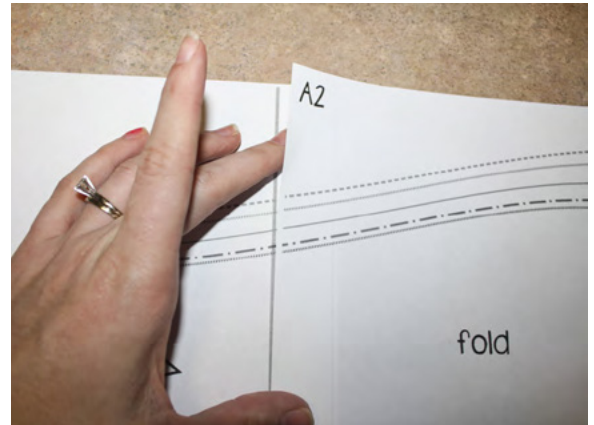

ALL SEAM ALLOWANCES ARE 1/4" AND 1/2" UNLESS OTHERWISE STATED.

Supply List:



- Fabric: Non-drape fabrics such as quilting cottons, poplin, etc.
- Iron-On Stabilizer: Mid weight fusible interfacing/buckram for cap pieces. Ultra firm fusible interfacing for the brim (Peltex 72 or FuseNShape 172f are great for this purpose).
- Basic Sewing Supplies: Scissors, sewing machine, thread, iron, and pins.
- Optional: Pompom trim, htv, ribbons, etc. for decoration.

Printing Guide:

Pattern pages:

Adventure Hat

PDF Sewing Pattern By Patterns for Pirates

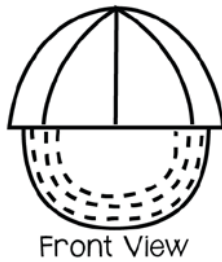

Front View

Back View

Each size has roughly 1/2" ease.

Size chart: 18" - 25" head circumference.

It is highly recommended to sew up a single cap to check for fit preference. If you are in-between sizes, it's recommended to size down. If you prefer a looser fit, choose the next size up.

Measure by wrapping the tape around the fullest point of your head, keeping it near the middle of your forehead and just above your ears.



Fabric Requirements: All in yards. Based on 44" wide fabric, does not account for shrinkage, cut off-grain, patterned fabric (takes more!), etc.

Main Fabric	1/4 yard
Lining Fabric	1/4 yard
Mid weight fusible interfacing/buckram	1/4 yard
Ultra firm fusible	5x10 piece

Preparing Your Pieces:

With most fabric types, you will want to apply buckram or midweight fusible interfacing to your main cap panel pieces. While this step is not required, it will allow for a more structured hat.

Repeating on ALL pieces, both main and cap lining, press wrong sides together 1/2" along the short, straight edge. Unfold. This will create a memory hem to be used later.



Creating the Cap:

Place two main panel pieces right sides together. Align at both the curved edges and the bottom.

With 1/4" seam allowance, stitch pieces together along ONE of the curved edges.

Trim seam allowance for a cleaner curve, being careful not to clip through your stitches.



Align a third panel piece, with right sides facing together, along one of the long, curved edges.

Using 1/4" seam allowance, sew along curved edge.

Place this group of main panel pieces to the side.

Repeat these steps with the remaining 3 panel pieces, creating another set of panels.



Place one of the panel sets face up.

Aligning curved edges, place the second panel set on top of the first. Fabrics should now be right sides together.

Using 1/4" SEAM ALLOWANCE, sew around entire top, curved edge.

**Repeat with lining fabric pieces.




Creating the Brim:

Place brim pieces with right sides together.

Using 1/4" seam allowance, sew along entire outer edge.

Trim seam allowance, careful not to clip through your stitches. Press.

Slide your brim stiffener inside of the brim piece, being sure to slide it as close as you can to the outer seam. If using an iron-on stabilizer, iron your stiffener in place.

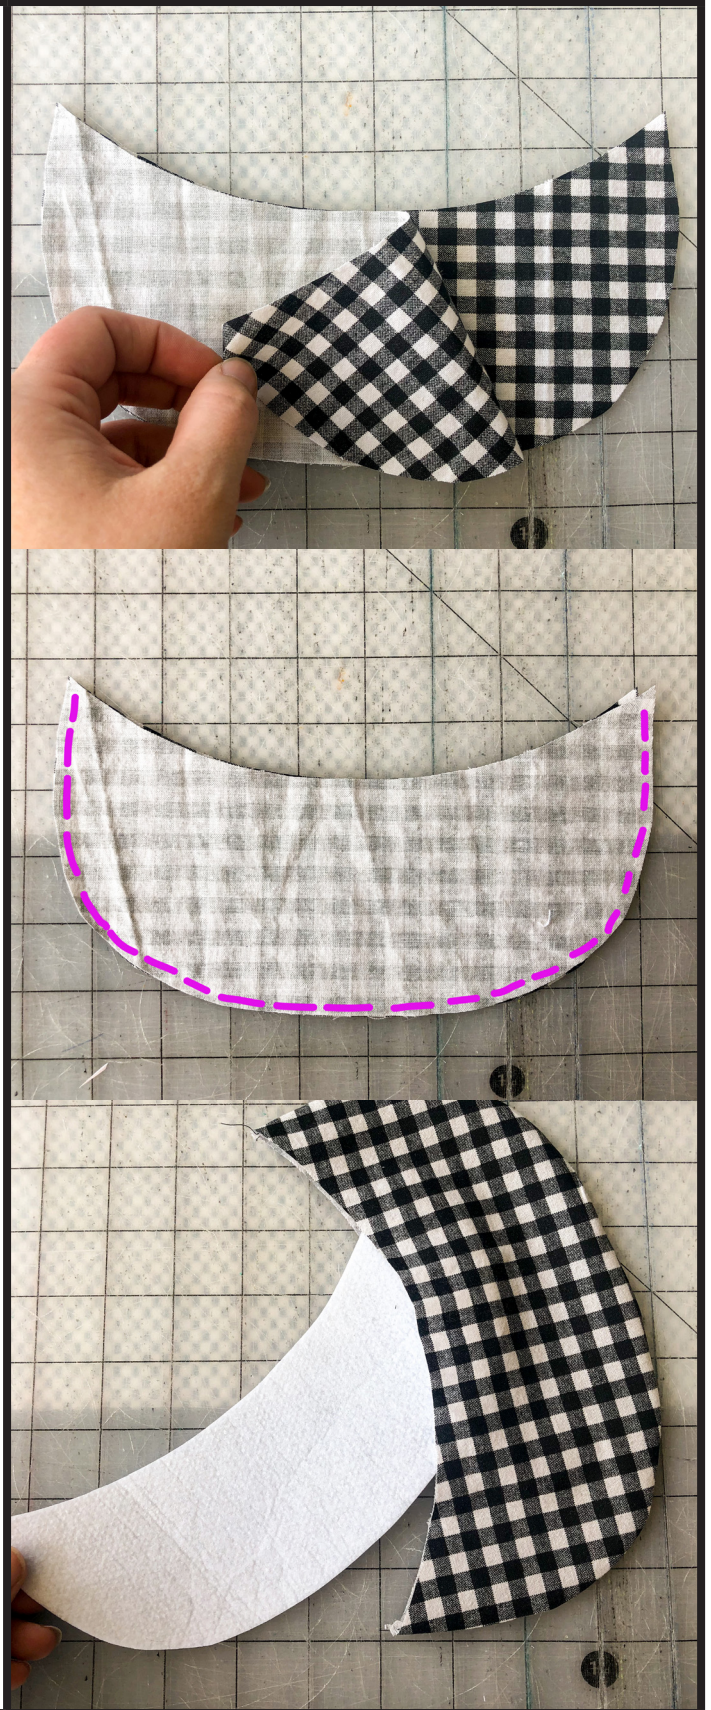

Stitch along brim, 1/4" from the outer edge. If desired, add additional lines of stitches on the brim piece.

Assembling the hat:

Using a pin or clip, locate the center of the brim along the raw edges.

With right sides together, pin/clip the brim piece to the main cap piece. You'll want to use one of the seams as a guide for the middle point, and then ease the brim into place along the cap.

Sew with a 1/2" SEAM ALLOWANCE.



Place the cap lining inside of the main cap piece, with wrong sides together:

Using the memory hem created at the beginning, fold both the main and lining pieces under 1/2". Pin or clip around the entire out edge, being sure that the raw edges are folded under and the seams are all aligned.

When you get to the brim, it's easier to use pins and align that folded edge against the stitches that you'd sewn in the previous step.



Edge stitch along entire outer edge.

If desired, sew with scant 1/8" allowance on either side of your cap seams, for a more finished look.



All done! :)

Don't forget to share on our Facebook page!
www.facebook.com/patternsforpirates

And Facebook group!
<https://www.facebook.com/groups/patternsforpiratesgroup>

A1

A2

2in x
2in

4cm
x4cm

Size/Line Color Key

18"	
19"	
20"	
21"	
22"	
23"	
24"	
25"	

Adventure Hat
BY Patterns for Pirates
Brim Insert
Cut 1 Brim Stiffener Material




B1

B2

A2

A3

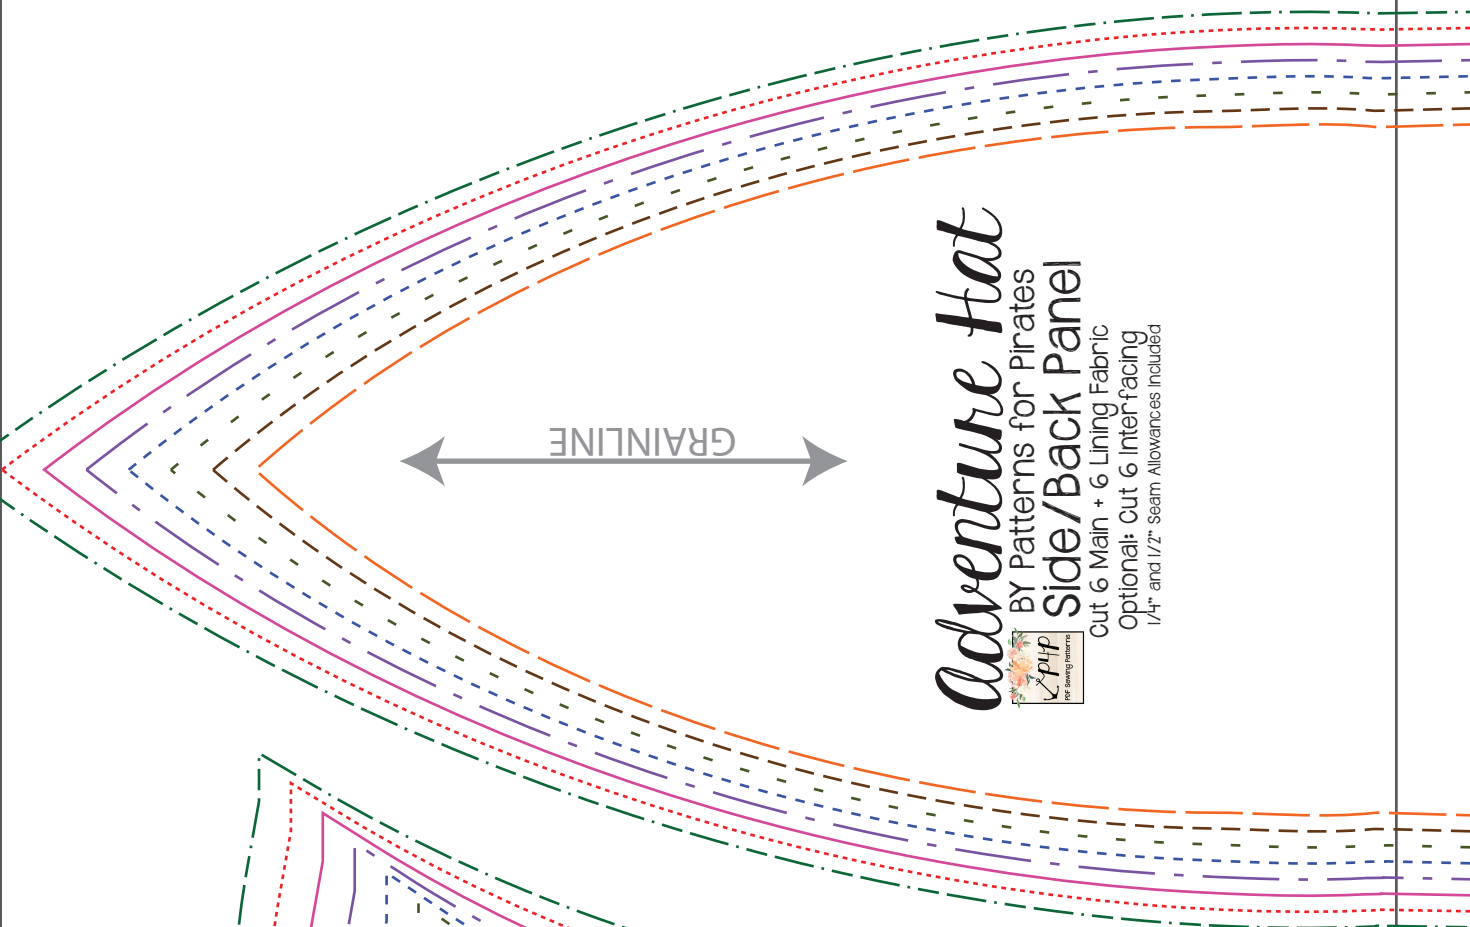

Adventure Hat


BY Patterns for Pirates

Side/Back Panel

Cut 6 Main + 6 Lining Fabric

Optional: Cut 6 Interfacing

1/4" and 1/2" Seam Allowances Included

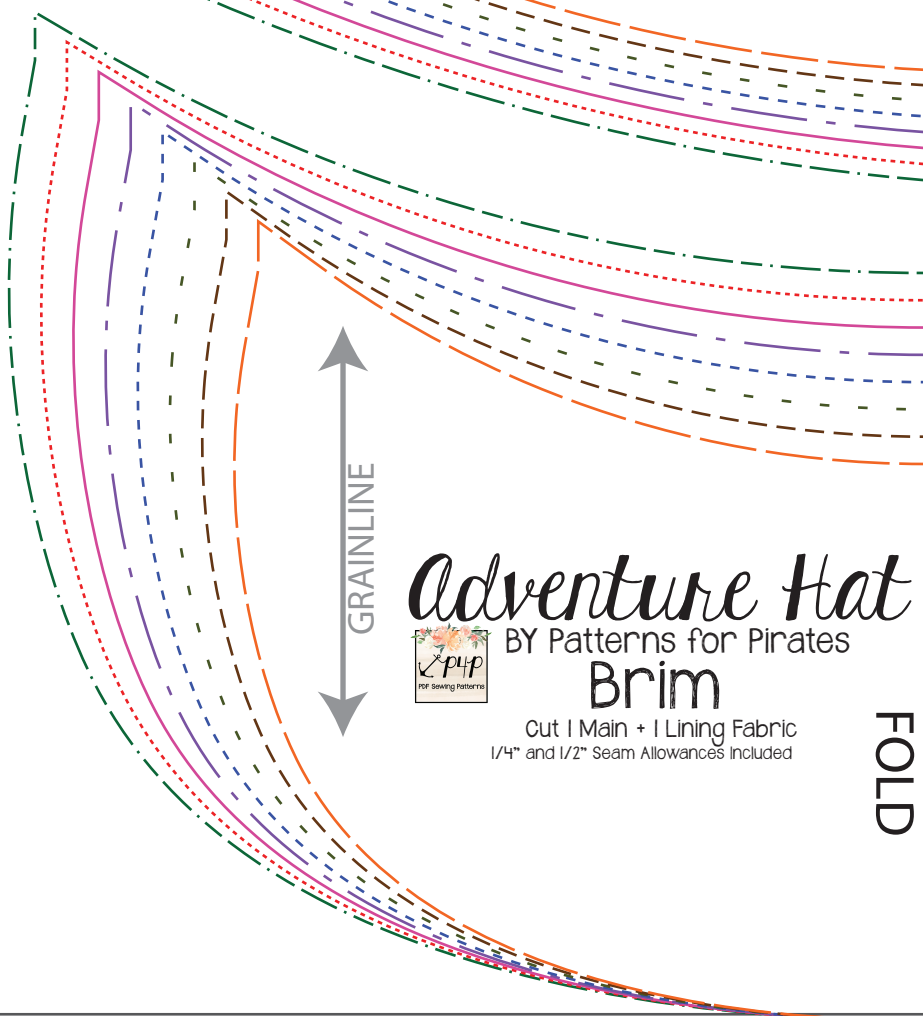

Adventure Hat

BY Patterns for Pirates

Brim

Cut 1 Main + 1 Lining Fabric

1/4" and 1/2" Seam Allowances Included



FOLD

B2

B3